

Party Wall Roll.

July 2026 | Data Sheet



Description.

Superglass Party Wall Roll is a non-combustible glass mineral wool insulation roll. The flexible roll is cut at 3x455mm widths to fit between standard wall ties, reducing the need for on-site cutting and waste.

Application.

Superglass Party Wall Roll is designed to provide thermal and acoustic insulation within masonry party/separating walls.

Superglass Party Wall Roll may be used as a component in several Robust Details Solutions including proprietary systems E-WM-22, E-WM-23 & E-WM-27. It may also be used in party wall systems which require on-site pre-completion. The product can be used as part of a full fill solution to achieve a zero effective U-value.

Performance.

Density:

Manufactured at a minimum density of 18kg/m³.

Thermal Conductivity:

Declared thermal conductivity (lambda (λ) value) of 0.036W/mK.

Fire Classification:

Deemed non-combustible with a fire classification of Euroclass A1 (the highest possible rating) when tested to EN 13501-1:2018 Reaction to Fire.



Typical applications:
Masonry party/separating walls.



Acoustic
Insulation



Thermal
Insulation



Non-
combustible



Recycled
Glass Content

intelligent environments
Superglass
by etex

superglass.co.uk

Party Wall Roll.

Technical Characteristics.

Product Specification.

Thickness (mm)	Length (m)	Width (mm)	Pack Area (m ²)	Packs per pallet	Thermal Conductivity (W/mK)	Thermal Resistance (m ² K/W)	Product Code
75	7.70	3x455	10.511	24	0.036	2.05	2144321
100	5.75	3x455	7.849	24	0.036	2.75	2144320
125	4.50	3x455	6.143	24	0.036	3.45	2144322
150	3.50	3x455	4.778	24	0.036	4.15	2144319

Please note that all dimensions are nominal.

Additional Information.

Vapour Resistivity.

The product has a nominal vapour resistivity of 5 MNs/gm.

Environmental Credentials.

- Our products and their pallets are wrapped in low-density polyethylene (LDPE4) plastic, which contains a minimum 30% recycled material and is fully recyclable. Before recycling, please consult your local authority for guidance.
- ISO 14001:2015 – Environmental Management Systems (EMS) certified. Certificate number: EMS 646508.
- Contains no ozone-depleting substances or greenhouse gases.
- Manufactured from up to 84% recycled glass.

Environmental Product Declarations (EPDs) for our products, detailing their overall environmental performance, are published and accessible on our website.

Standards and Approvals.

Manufactured in accordance with:

- BS EN 13162:2012+A1:2015 Thermal insulation products for buildings - Factory made mineral wool (MW) products.
- BS EN 13172: 2012 Thermal insulation products – Evaluation of conformity.
- ISO 9001:2015 – Quality Management Systems (QMS). Certificate number: FM 02264.

Certifications.

- UKCA certified to BS EN 13162:2012+A1:2015. Certificate number: 0086 CPR 469699.
- CE marked to EN 13162:2012+A1:2015. Certificate number: 0751-CPR-399.0-01.
- CCPI (Code for Construction Products Information) Assessment Mark. Certificate number: 005800127/0227.

EUCEB (European Certification Board of Mineral Wool Products).

All Superglass glass mineral wool products are made of non-classified fibres and are certified by EUCEB. EUCEB is a voluntary initiative by the mineral wool industry. It is an independent certification authority that guarantees that products are made of fibres which comply with the exoneration criteria for carcinogenicity (Note Q) of the Regulation (EC) 1272/2008. Certificate number: BEUC-511-27949-491-14462.

Handling & Storage.

The product must be stored and handled in a manner that ensures it remains clean and undamaged. It is supplied compression-packed in polythene, which provides short-term protection only. For long-term protection, store the product indoors or under a waterproof covering, raised off the ground, to prevent weather-related damage.

During construction, all exposed areas of the product must be covered at the end of each working day and during adverse weather conditions, including rain, wind, or snow. Use polythene sheeting or an equivalent protective cover to prevent water saturation. The product must not be left permanently exposed to the elements.

All Superglass products are non-hygroscopic, will not rot, degrade, or sustain vermin and will not encourage the growth of mould, bacteria, or fungi.


Party Wall Roll.

Technical Characteristics.

Recommended solutions

robustdetails®

E-WM-22

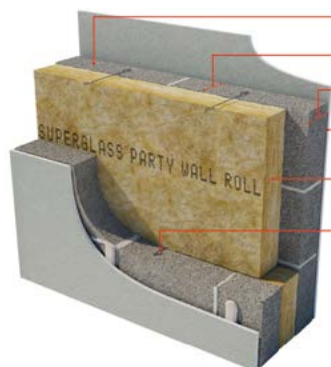

Block density: 1350 to 1600 kg/m³

Cavity width: 100mm (min)

Block thickness: 100mm (min), each leaf


Wall finish: Gypsum based board mounted on dabs (nominal 10kg/m²)

Insulation: SUPERGLASS PARTY WALL ROLL

Wall Ties: Approved Document E 'Tie type A'

External flanking wall: Masonry (both leaves) with 50mm (min) cavity - fully filled or partially filled with Superglass Superwall Cavity Slabs or fully filled with Superglass Superwhite 34 Blown Cavity Insulation.

E-WM-23

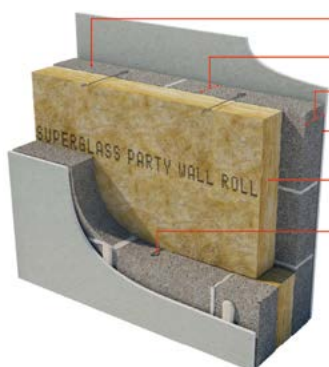

Block density: 600 to 800kg/m³

Cavity width: 100mm (min)

Block thickness: 100mm (min), each leaf


Wall finish: Gypsum based board mounted on dabs (nominal 8kg/m²)

Insulation: SUPERGLASS PARTY WALL ROLL

Wall Ties: Approved Document E 'Tie type A'. For thin joint, wall ties must be Ancon Building Products Staifix HRT4 or Clan PWT4 at no more than 2.5 ties per square metre

External flanking wall: Masonry (both leaves) with 50mm (min) cavity - fully filled or partially filled with Superglass Superwall Cavity Slabs or fully filled with Superglass Superwhite 34 Blown Cavity Insulation.

E-WM-27

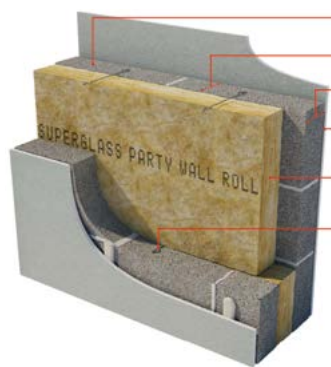

Blocks: 1350 to 1600 kg/m³

Cavity width: 75mm (min)

Block thickness: 100mm (min), each leaf

Wall finish: Gypsum based board mounted on dabs (nominal 8kg/m²)

Insulation: SUPERGLASS PARTY WALL ROLL

Wall Ties: Approved Document E 'Tie type A'

External flanking wall: Masonry (both leaves) with 50mm (min) cavity - fully filled or partially filled with Superglass Superwall Cavity Slabs or fully filled with Superglass Superwhite 34 Blown Cavity Insulation.

The requirements of the Robust Details Handbook should be strictly followed.

Party Wall Roll.

Technical Characteristics.

Suitable for use in **robustdetails** masonry party walls

Superglass Party Wall Roll can be used in the following Robust Details specifications:

Robust Details Solutions - England, Wales & Northern Ireland				
Robust Detail	Minimum Cavity Width (mm)	Block Type & Density (kg/m³)	Parge Coat Required	Wall Finish
E-WM-1	75	Dense Aggregate - 1850 to 2300	No	Wet Plaster
E-WM-2	75	Lightweight Aggregate - 1350 to 1600	No	Wet Plaster
E-WM-3	100	Dense Aggregate - 1850 to 2300	Yes	Render and gypsum-based board on dabs
E-WM-4	75	Lightweight Aggregate - 1350 to 1600	Yes	Render and gypsum-based board on dabs
E-WM-5	75	Holcim Star Performer - 1528	Yes	Render and gypsum-based board on dabs
E-WM-6	75	Aircrete - 600 to 800	Yes	Render and gypsum-based board on dabs
E-WM-10	75	Aircrete - Thin Joint System - 600 to 800	Yes	Render and gypsum-based board on dabs
E-WM-11	100	Lightweight Aggregate - 1350 to 1600	Yes	Render and gypsum-based board on dabs
E-WM-12	75	Plasmor 'Aglite Ultima' - 1050	Yes	Render and gypsum-based board on dabs
E-WM-13	75	Aircrete - Thin Joint Untied System - 600 to 800	Yes	Render and gypsum-based board on dabs
E-WM-18	100	Dense Aggregate - 1850 to 2300	No	Wet Plaster
E-WM-19	100	Dense or Lightweight Aggregate - 1350 to 1600 or 1850 to 2300	Yes	Render and gypsum-based board on dabs
E-WM-21	100	Lightweight Aggregate - 1350 to 1600	No	Wet Plaster
E-WM-22	100	Lightweight Aggregate - 1350 to 1600 or Plasmor 'Aglite Ultima' - 1050	No	Gypsum-based board on dabs
E-WM-23	100	Aircrete - Standard and Thin Joint - 600 to 800	No	Gypsum-based board on dabs
E-WM-25	100	Porotherm - Thin Joint - n/a	Yes	Ecoparge gypsum-based board on dabs
E-WM-26	100	Holcim Star Performer - 1528	No	Gypsum-based board on dabs
E-WM-27	75	Lightweight Aggregate - 1350 to 1600	No	Gypsum-based board on dabs
E-WM-29	75	Porotherm - Thin Joint - n/a	Yes	Ecoparge gypsum-based board on dabs
E-WM-31	100	H+H Celcon Elements - Thin Joint - 575	No	Gypsum-based board on dabs
E-WM-34	100	Plasmor 'Aglite Ultima' - 1050	No	Gypsum-based board on dabs

The requirements of the Robust Details Handbook should be strictly followed.



Etex UK Insulation Limited | Thistle Industrial Estate | Kerse Road | Stirling | FK7 7QQ | UK

PWR09
July 2026

Technical

Hotline: 0808 1645 134

Email: technical.stirling@etexgroup.com

Customer Services

Tel: 01786 451170

Email: customerservice.stirling@etexgroup.com

Social

[superglass_uk](#)

[superglassuk/](#)

[superglassinsulationuk](#)