



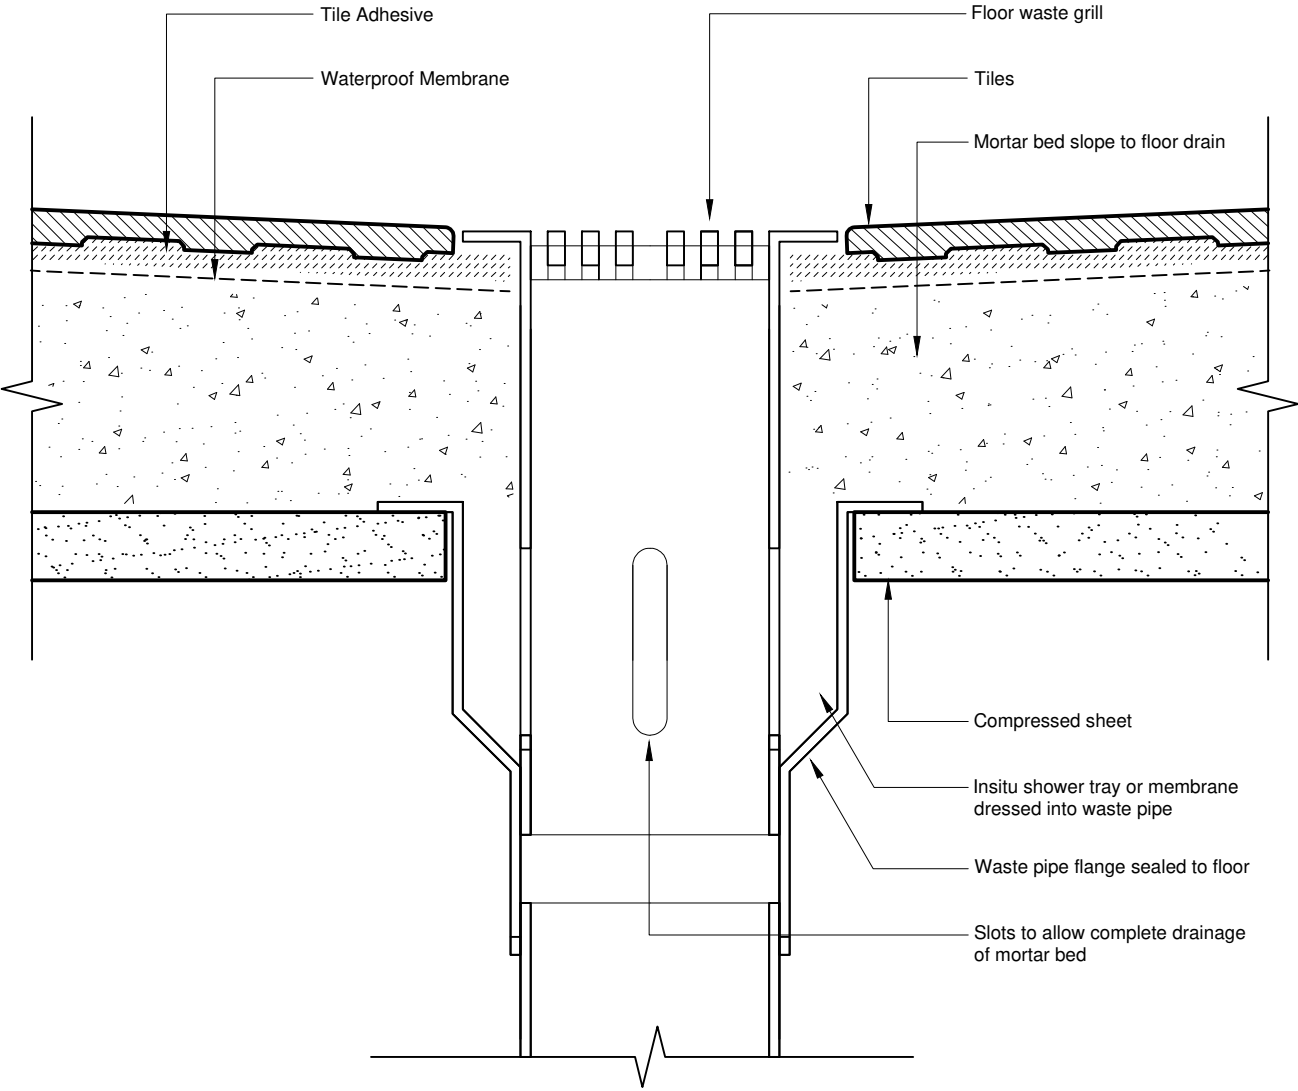


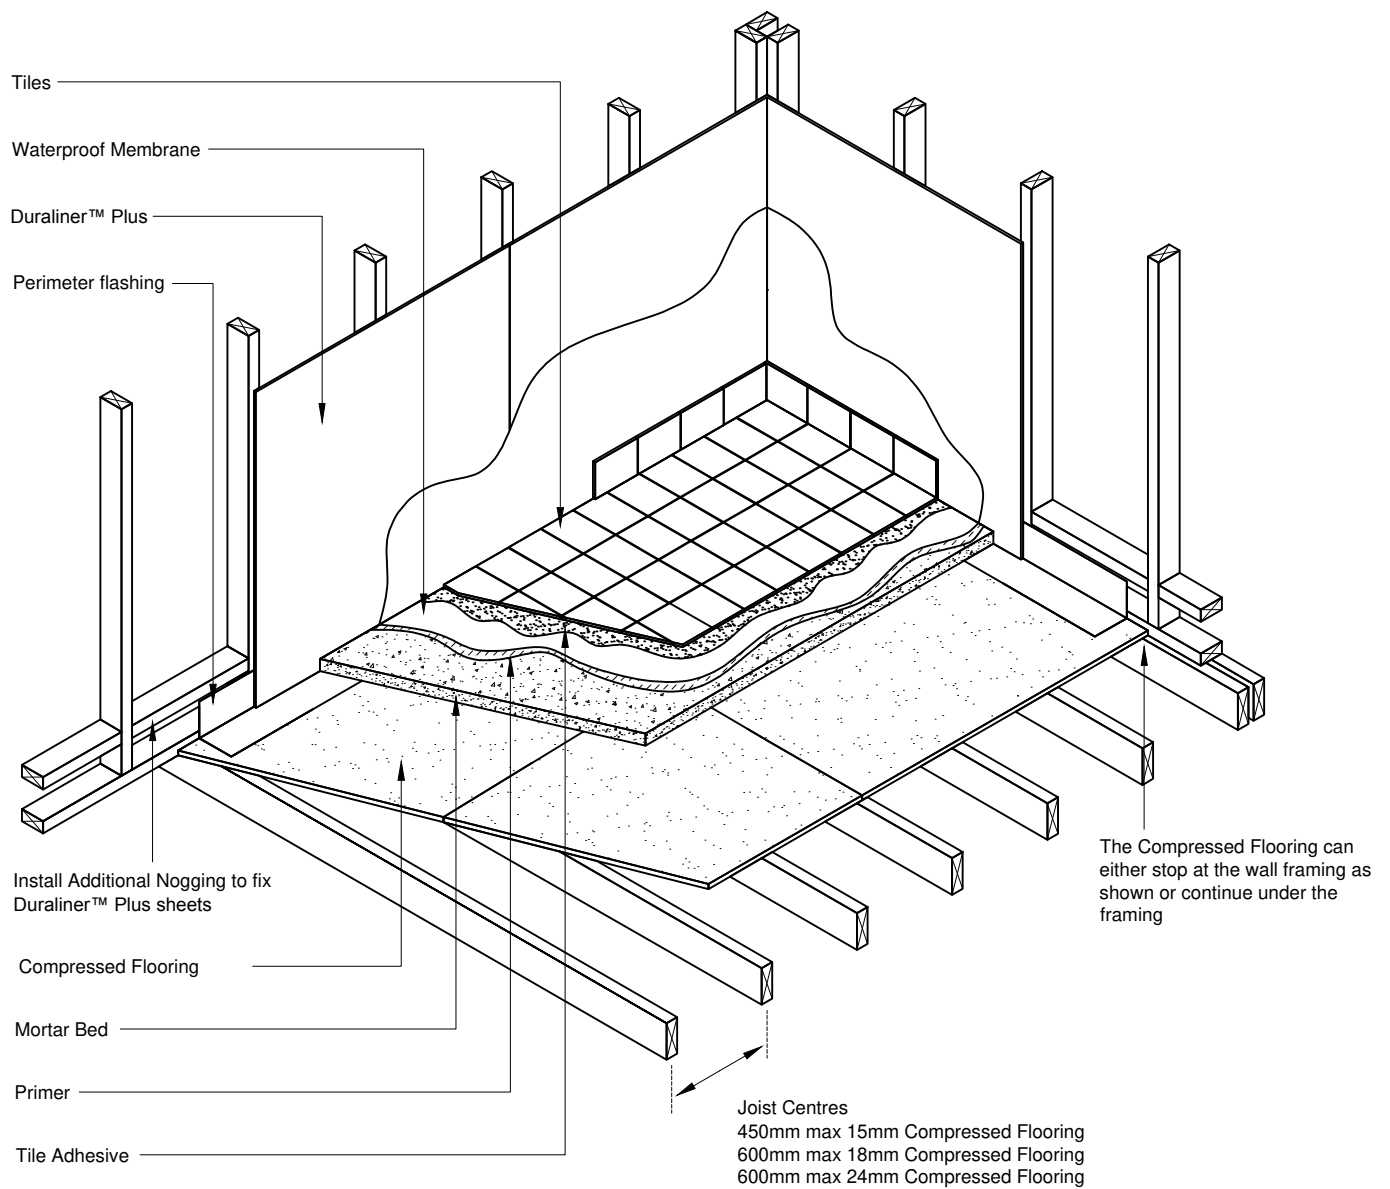

Profile
Detail

Compressed Fibre Cement
Wet Area - Typical Detail


Date Mar 2015
 Scale 1:2
 Detail No. ACOM_002

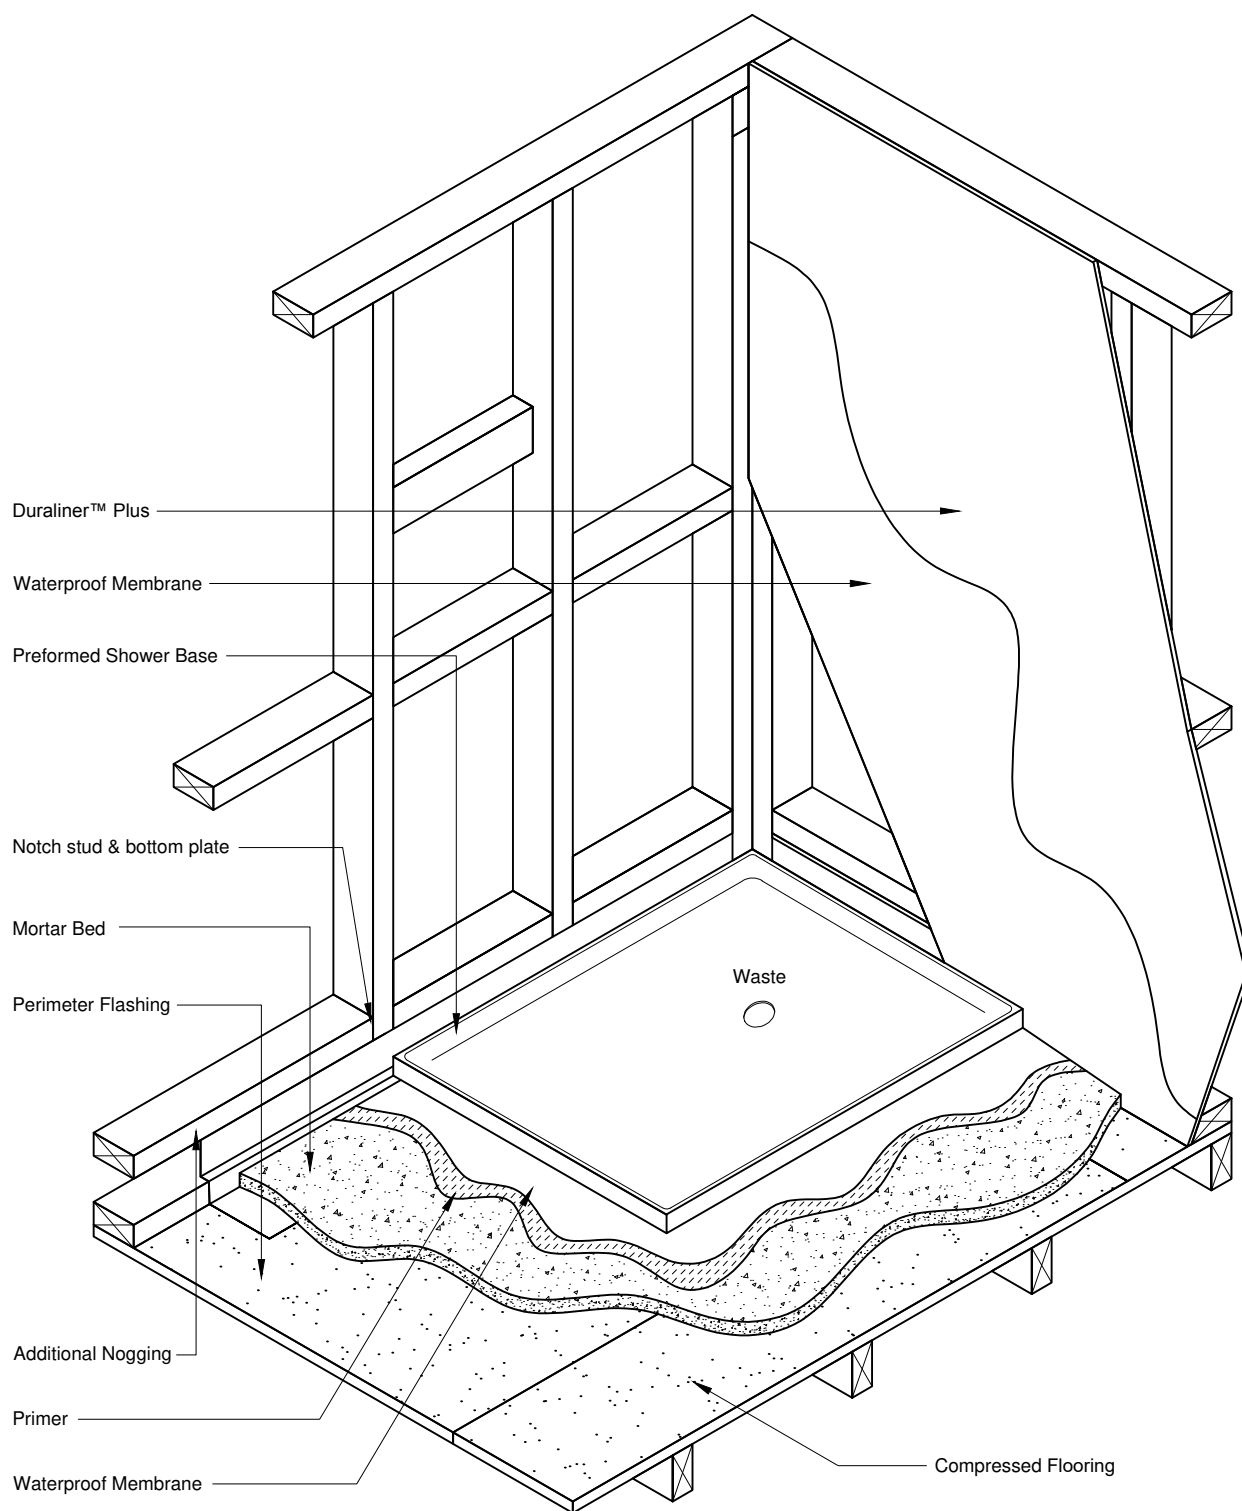

Profile
Detail


Compressed Fibre Cement
Shower Recess

Date Mar 2015
Scale 1:2
Detail No. ACOM_003

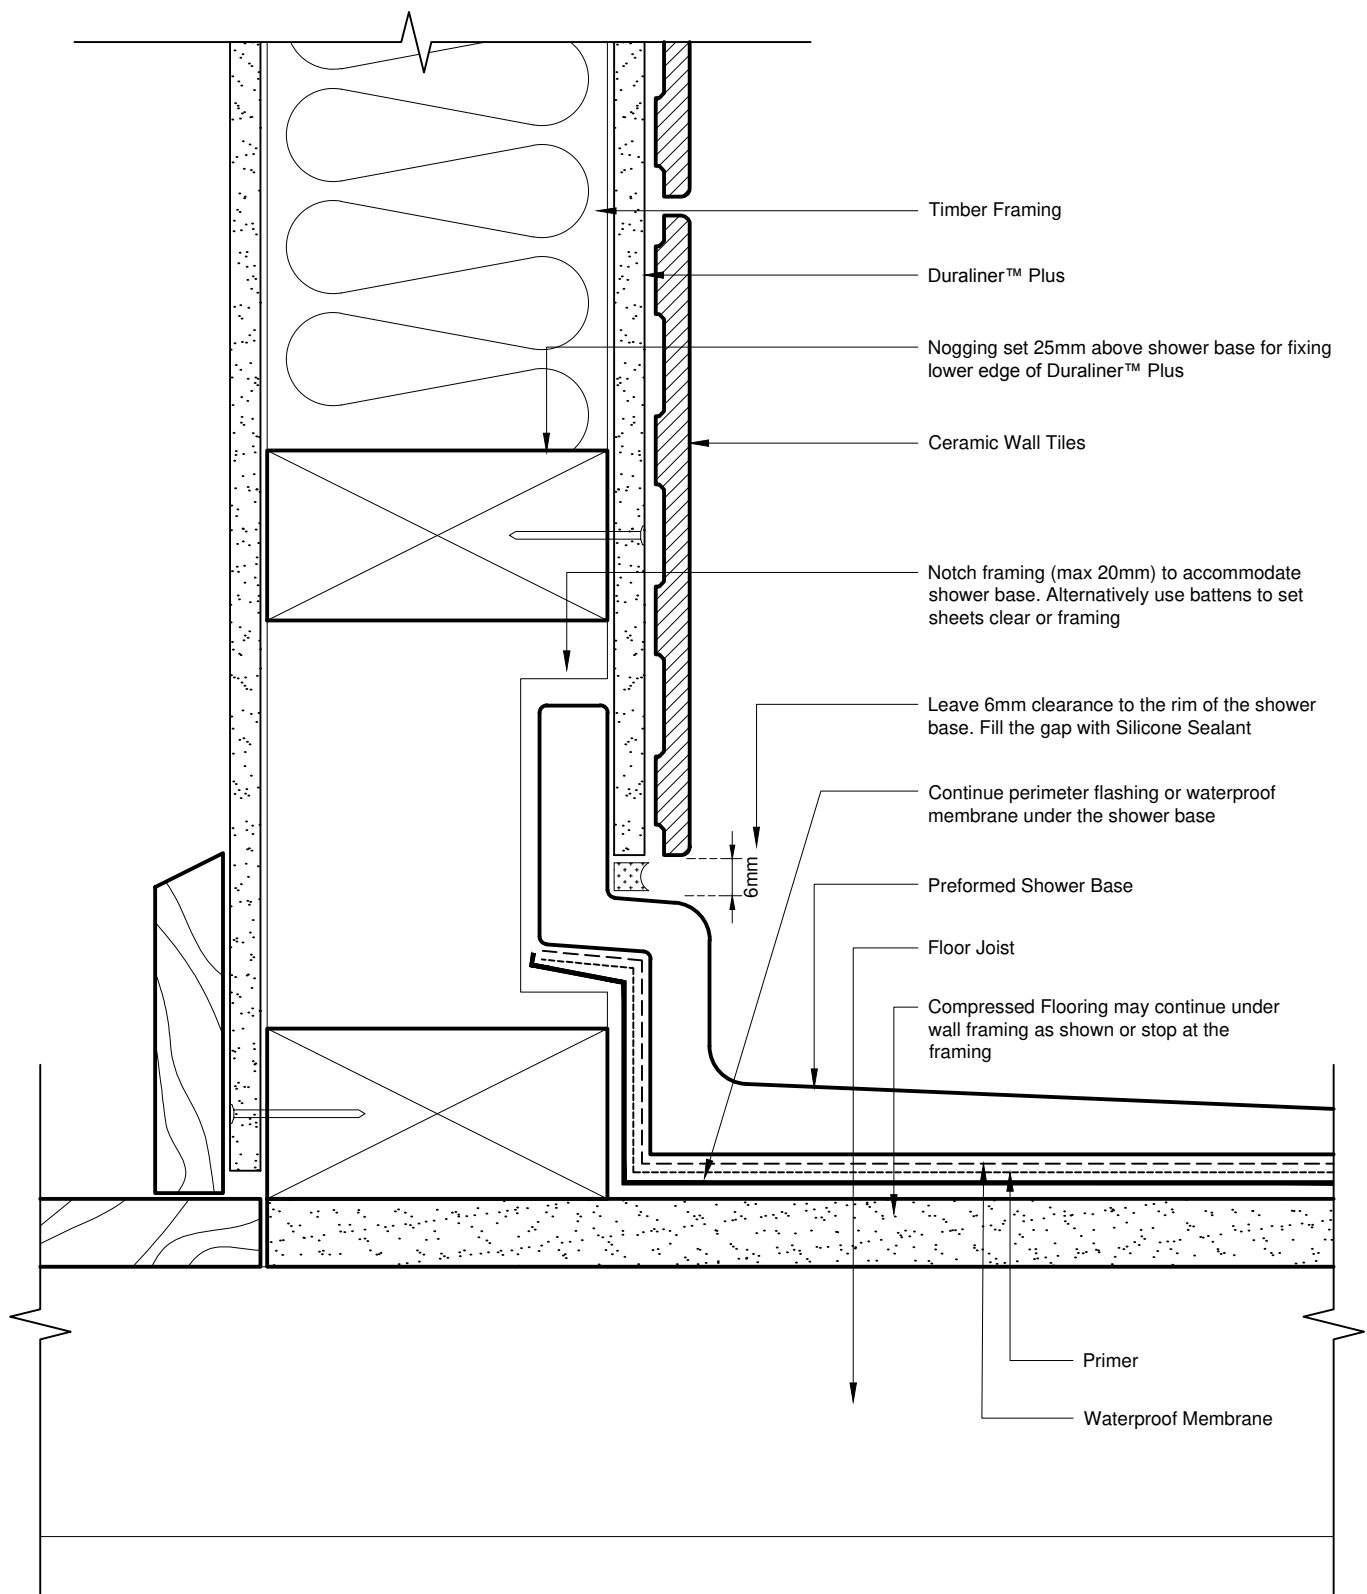

Profile Compressed Fibre Cement
 Detail Preformed Shower Base


Date Mar 2015
 Scale 1:2
 Detail No. ACOM_004

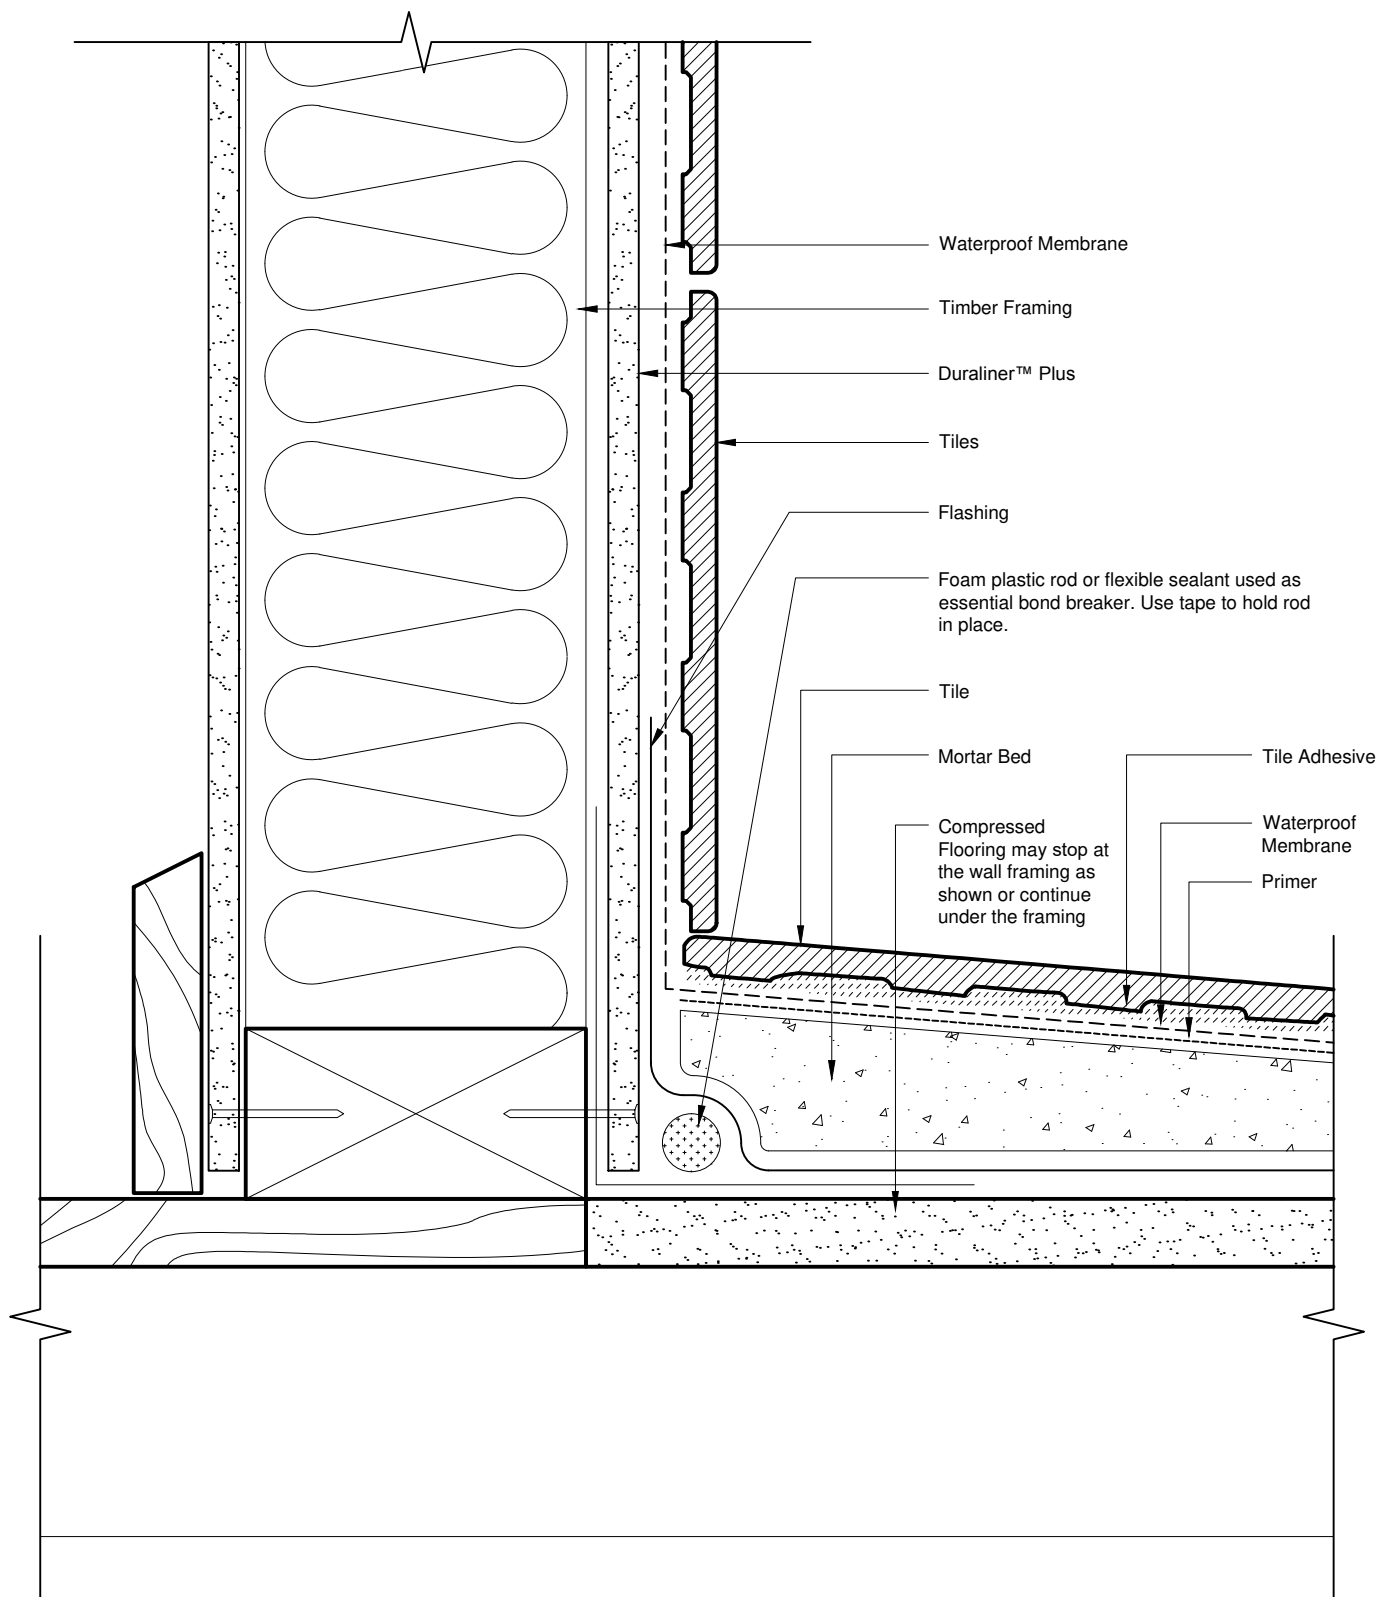

Profile
Detail


Compressed Fibre Cement
Using Waterproof Membrane


Date Mar 2015
Scale 1:2
Detail No. ACOM_005

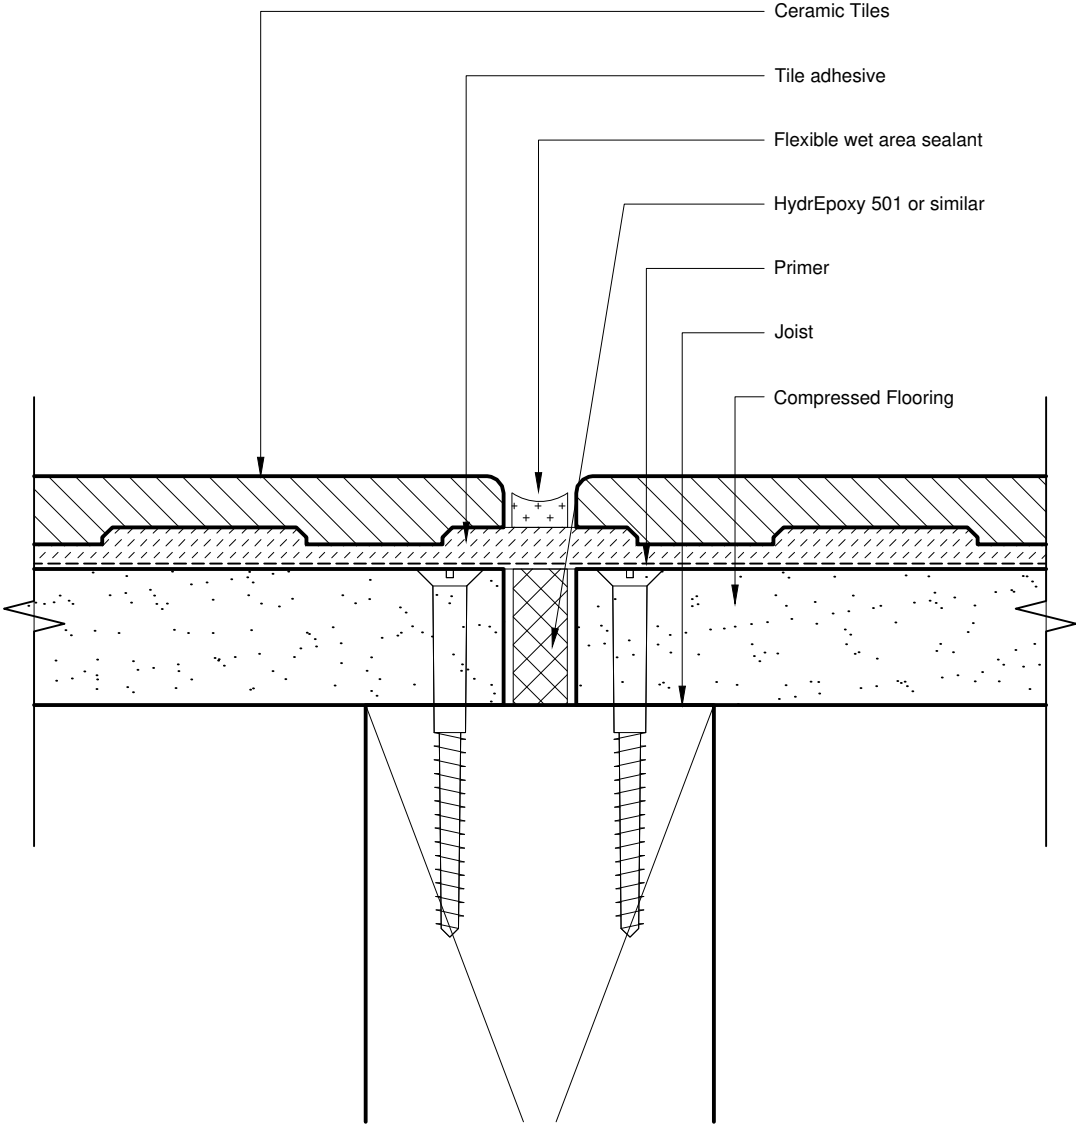


Profile Compressed Fibre Cement
Detail Tiles & Sheet Joints


Date Mar 2015
Scale 1:1
Detail No. ACOM_006

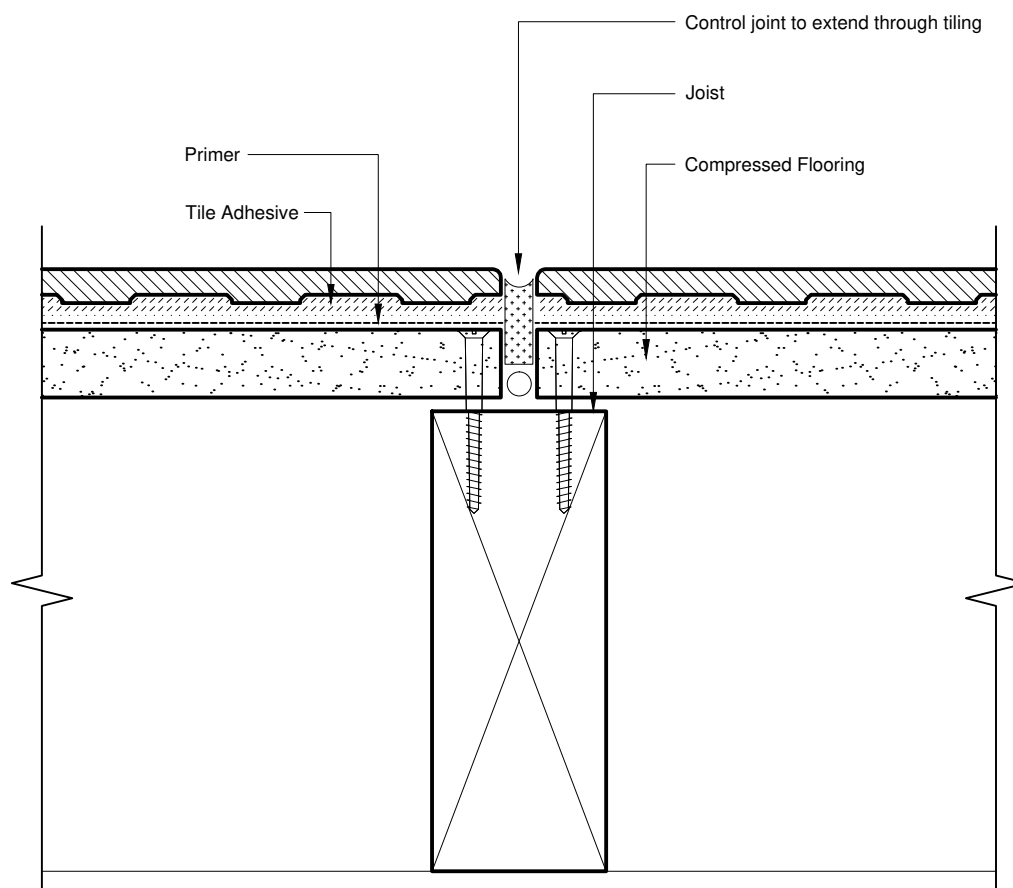

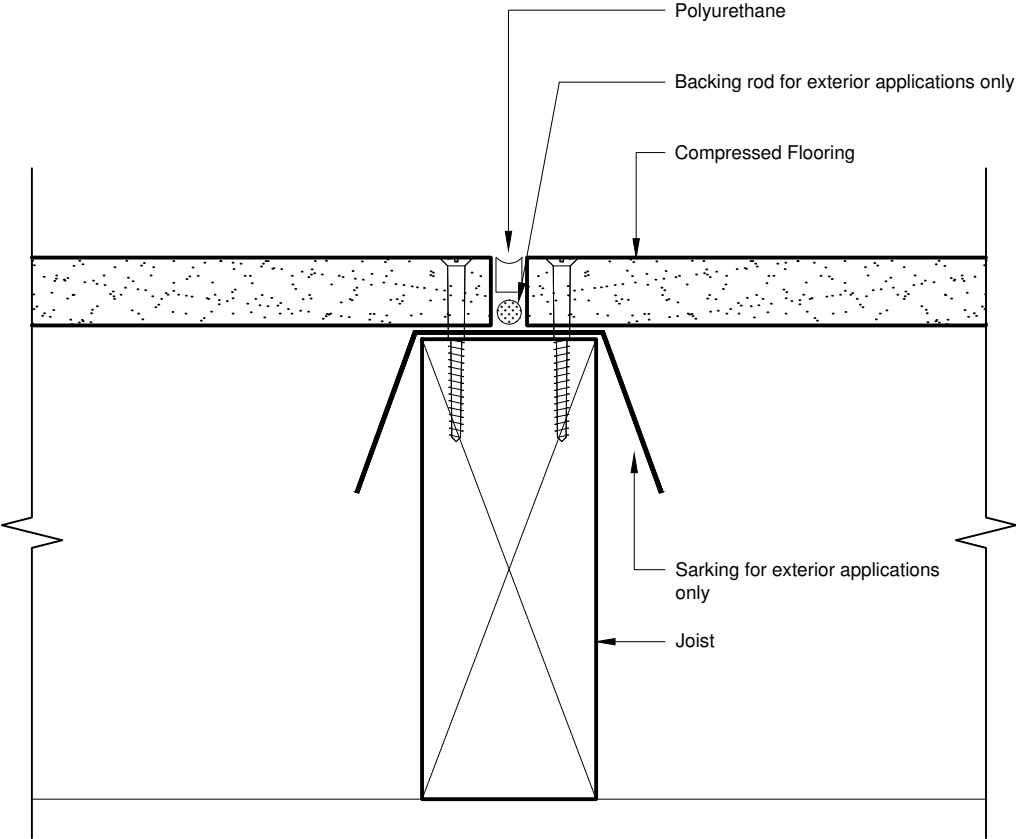

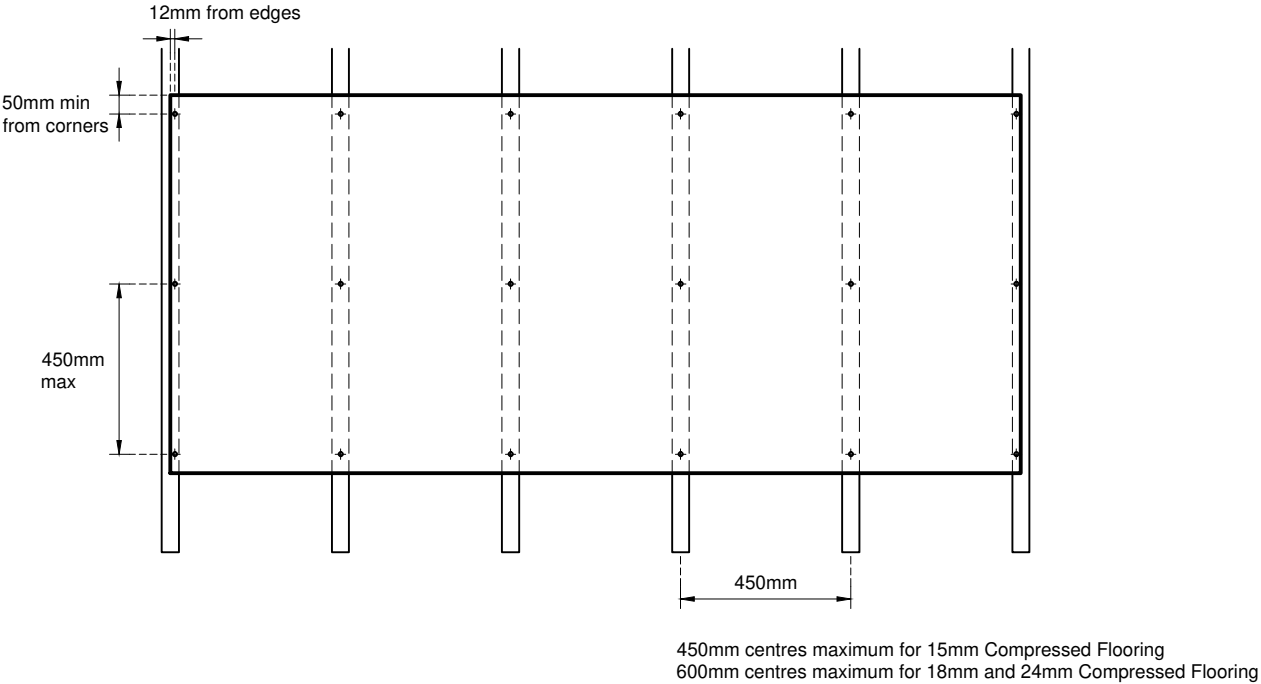


Note:
Min. 45mm Joist face for exterior applications
Min. 38mm Joist face for interior applications

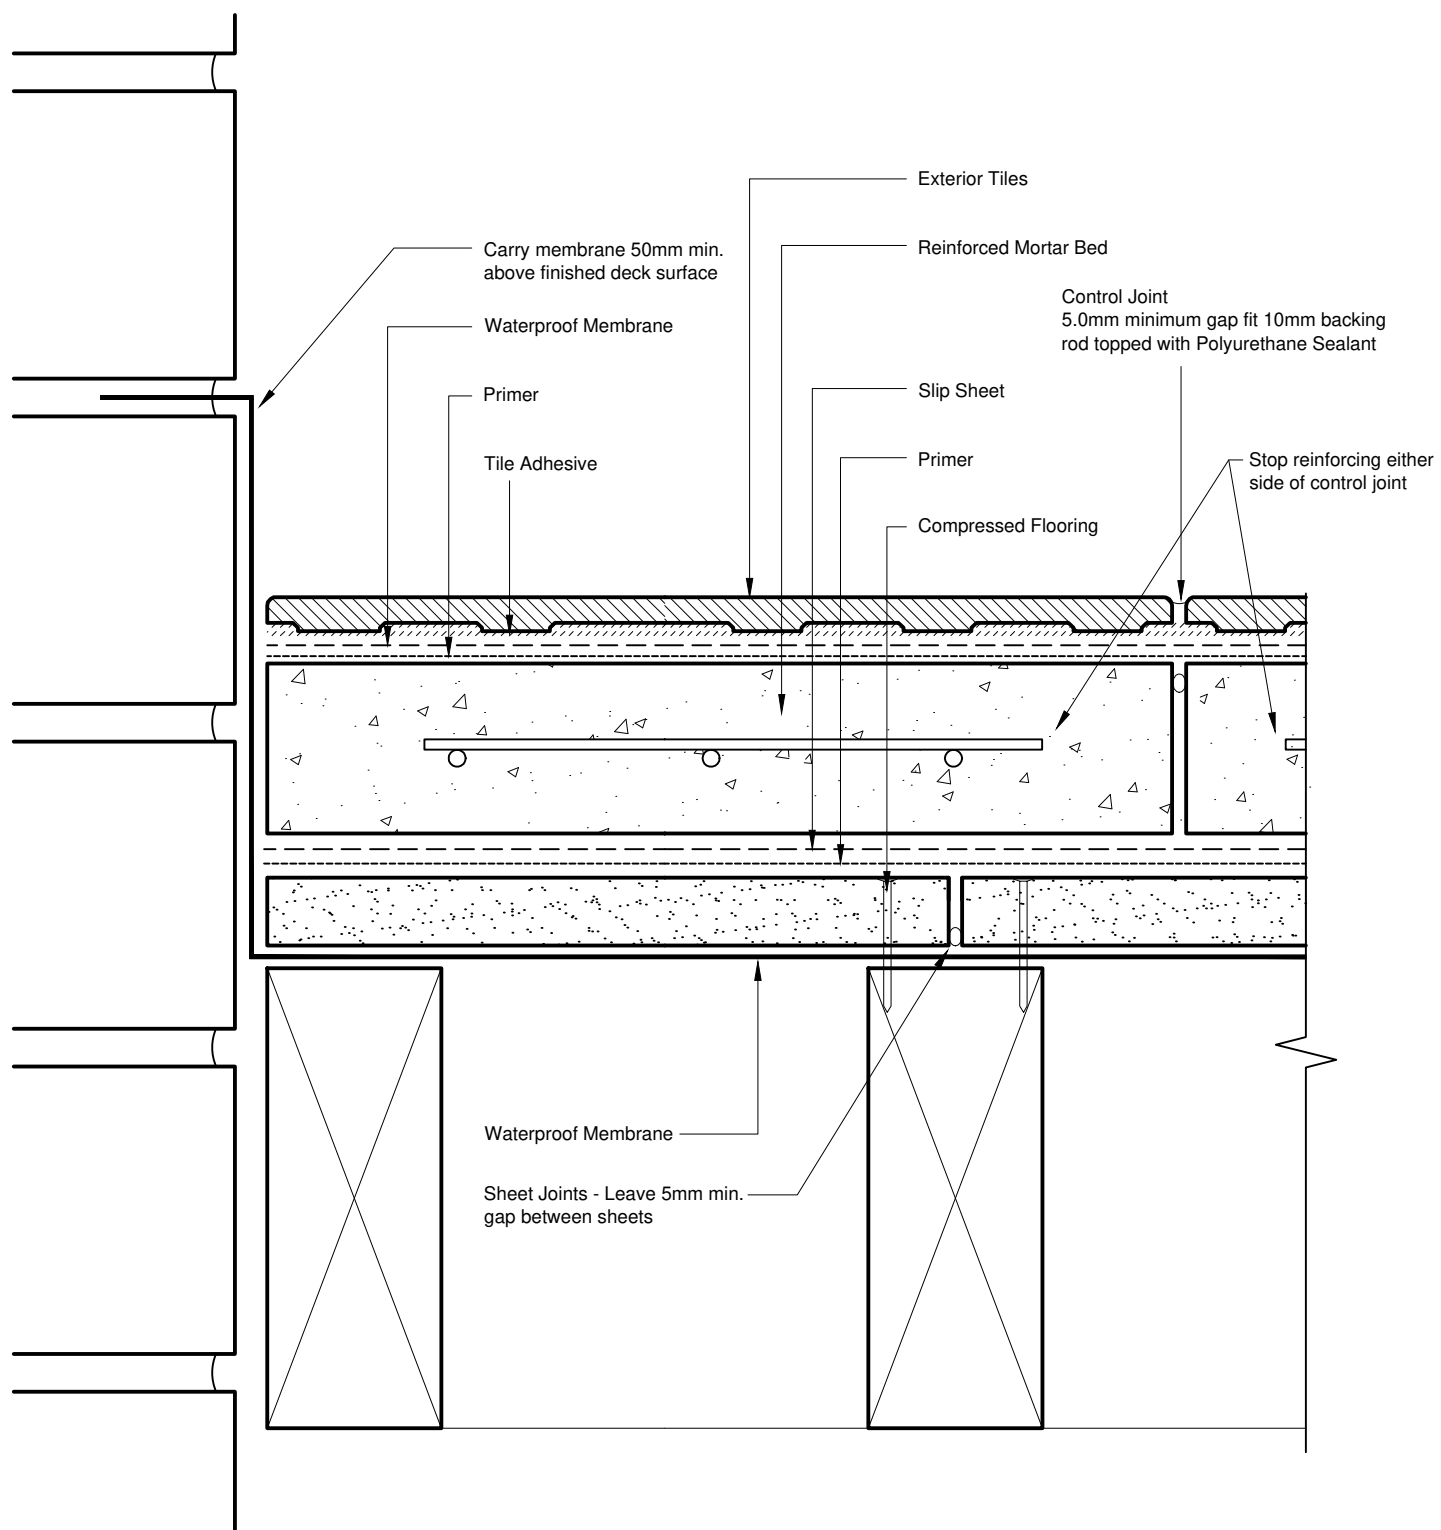

Profile Compressed Fibre Cement
 Detail External Deck
 Waterproof with Mortar Bed

Date Mar 2015
 Scale 1:2
 Detail No. ACOM_010

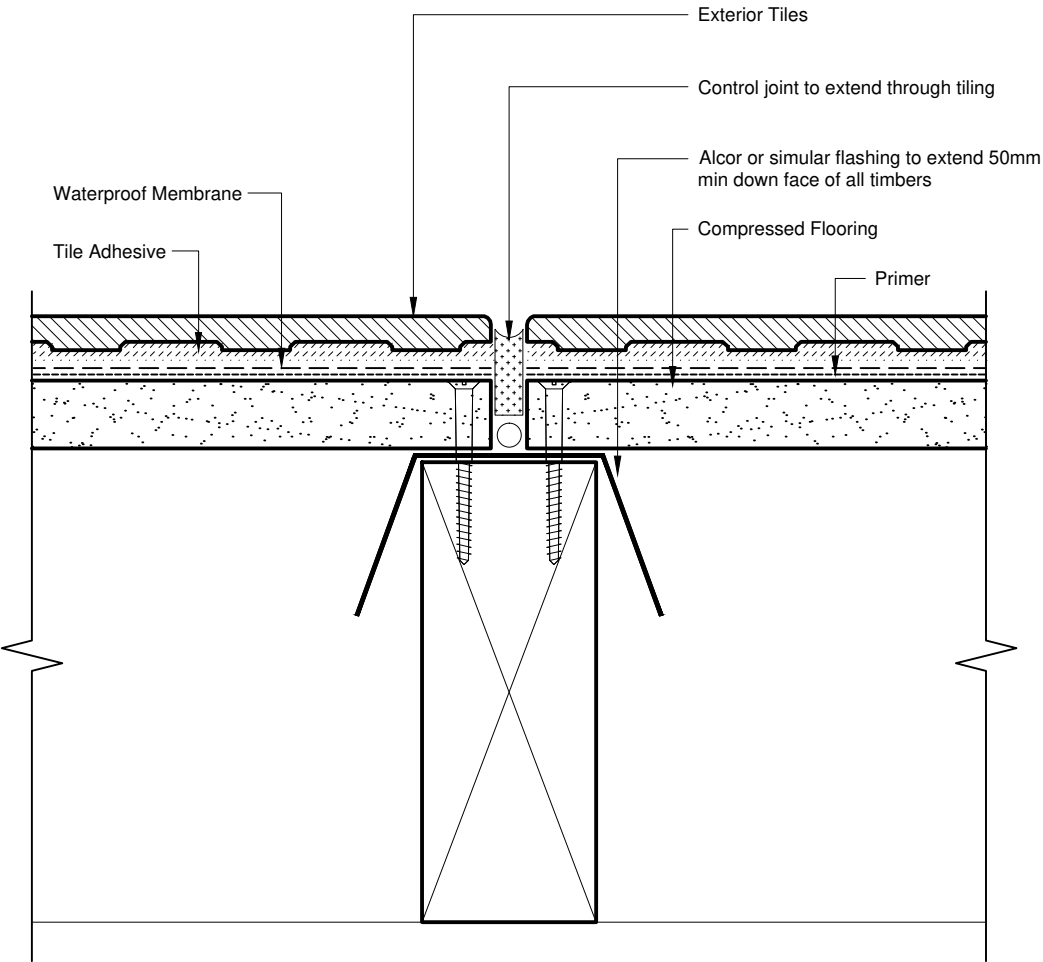

Profile Compressed Fibre Cement
Detail Exterior Decking Low Level

Date Mar 2015
Scale 1:2
Detail No. ACOM_011

