

# NZ Product brochure

August 2025

Fibre cement specialists.



Backed by Etex, the global leader in fibre cement, Innova is bringing the change the industry needs. So now architects, builders, and homeowners can make the changes they want.

We'll never stop innovating our stylish fibre cement range.
We'll never stop finding efficiencies and passing on the savings.

Change is what defines us and propels us forward. Change is the foundation we're built on.

Innova. Built on change.



Innova is New Zealand's top supplier of facades and linings, committed to bringing design, quality and value to domestic and commercial projects of all sizes.

Inside and out, we offer traditional and contemporary styling, with a wide variety of designs, created to inspire and impress. You'll also enjoy the peace of mind of a smooth building process with products that are versatile, durable and will stand the test of time.

This is form and function. This is art and innovation.

This is Innova.
The range you've been waiting for.

### Exterior and interior walls Weatherboards Nuline® Stratum® Contour® Duraplank® Exterior facades Duragroove® Durascape® Duragrid® Duracom® Exterior base sheets Stonesheet® Pre-finished facades Montage® Pre-cladding Durabarrier®

### Eaves and soffits

3

4

7

12

15

19

20

23

26

29

31

32

**35** 36

45

46

49

50

52

54

Eaves lining and somts	51
Durasheet®	58
Duralux®	60
Intergroove®	62
Flooring and underlay	
Flooring	65
Durafloor®	66
Compressed flooring	68
Underlay	7
Ceramic tile underlay	72
Effects	
Effects® fascia	76

### Warranty

Interior linings

Duraliner®

Innova on the inside

Intergroove®

Please refer to innovafibrecement.co.nz for detailed warranty information.



### Exterior and interior walls

# Weatherboards

# **Nuline**<sup>®</sup>

### Weatherboards

Nuline® is a sleek, weatherboard-style cladding system designed to deliver a modern and sophisticated aesthetic. It offers the timeless charm of traditional weatherboards without the ongoing maintenance associated with timber.

Thanks to its innovative tongue-and-groove design, Nuline® ensures perfectly consistent joins across your project. Additionally, the slight bevel on the rear of each plank provides a 25mm bearing face on the stud, making fixing and nailing both straightforward and efficient.






#### Features and benefits

- Extend your options with 3 width options 150, 175 and 205mm.
- Delivered primed and ready for painting, saving preparation time.
- Built for longevity with high durability and resistance to rot and decay.
- Quick, simple installation: manual nailing, gun nailing or screw fixing.
- Can achieve 30 and 60min Fire Rating.
- BRANZ Appraised no.'s 640 and 641.

Thickness mm	Profile	Weight kg/lm	Width mm	Length mm	Product code	Pack size
14	Square	2.9	150	4200	4093655	126
	Square	3.4	175		4092767	120
	Square	4	205		4092768	120



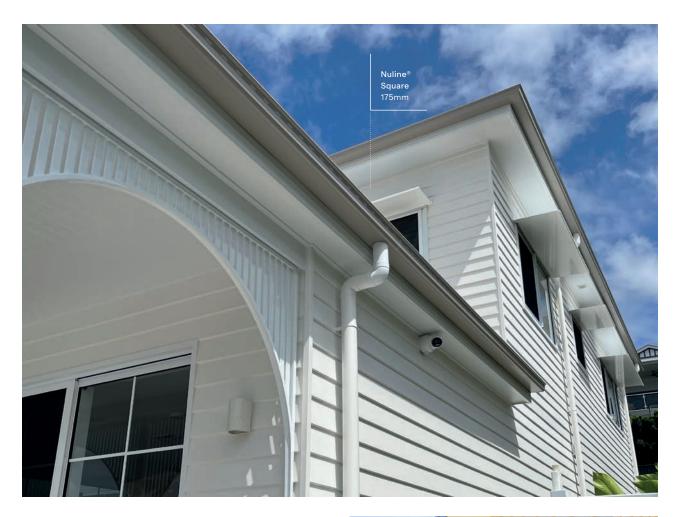

### Profile



Square



Product: Nuline® Square 175mm



Product: Nuline® Square 175mm







Δlumin	ium	internal	l cornar

Aluminium external corner

Nuline® external	corner	soaker	-
Aluminium			

					<b>.</b>
Size mm	Product code	Size mm	Product code	Size mm	Product code
3000×36	4092823	3000×36	4092819	150	4092889
4000 × 36	4092660	4000×36	4092915	175	4094306
				205	4092908







 $Nuline {}^{\tiny{\$}}\ external\ corner\ soaker\ -$ 

Stainless Steel

Pre-cut scriber

Innova edge sealer

Size mm	Product code	Profile	Size mm	Product code	Size g	Product code
150	4093656	150	40 × 18 × 5400	4093707	400	4092899
175	4092907	175	40 × 18 × 5400	4093709	-	
205	4092909	205	40×18 ×5400	4093708		



Cavity vent strip

Size mm	Product code
2700×19	4092887

## **Stratum**<sup>®</sup>

### Weatherboards

A vibrant, innovative alternative to traditional weatherboards, Stratum® is an endlessly adaptable range of weatherboard products. Choose one Stratum® profile as a standalone, or mix'n'match two or three to create eye-catching and original exterior cladding.

Stratum® is designed with a shiplap join, meaning installation is quicker and easier and the smooth profiles come pre-primed to speed up the painting process.

### 7 unique profiles make up the Stratum® range

- Stratum<sup>®</sup> is a 300mm wide weatherboard.
- Stratum® Woodgrain is a 300mm wide weatherboard embossed with a woodgrain pattern giving a timber like appearance.
- Stratum® Duo is a 300mm wide weatherboard with a 16mm centre groove giving the look of two slimmer weatherboards.
- Stratum® Duo Offset is a 300mm wide weatherboard with a 16mm groove located on the lower third of the weatherboard giving the appearance of 1 slim board and 1 wider one.
- Stratum® Duo Woodgrain is a 300mm wide weatherboard with a 16mm centre groove giving the look of two slimmer weatherboards embossed with a woodgrain pattern giving a timber like appearance.

- Stratum® Trio is a 300mm wide weatherboard with 2 × 16mm horizontal grooves.
- Stratum® Trio Woodgrain is a 300mm weatherboard with 2 x 16mm horizontal grooves embossed with a woodgrain pattern giving a timber like appearance.

#### Features and benefits

- Features easy shiplap joining for a seamless finish.
- Smooth profiles are primed and ready for painting, saving preparation time.
- Quick, simple installation: manual nailing, gun nailing or screw fixing.
- Horizontal or vertical Installation.
- BRANZ Appraise no.'s 847 and 1060.
- Can achieve a 30 and 60 min Fire Rating.








Thickness mm	Profile	Weight kg/lm	Width mm	Length and product code	
				2700mm	4200mm
12	Stratum®	5	300	4092769	4092770
	Stratum® Woodgrain	5		4092786	4092787
	Stratum® Duo	4.3		4092773	4092775
	Stratum® Duo Woodgrain	4.3		4092776	4092777
	Stratum® Duo Offset	4.3			4092779
	Stratum® Trio	4.2		4092783	4092781
	Stratum® Trio Woodgrain	4.2		4092784	4092785
Pack size				120	90


### **Profiles**

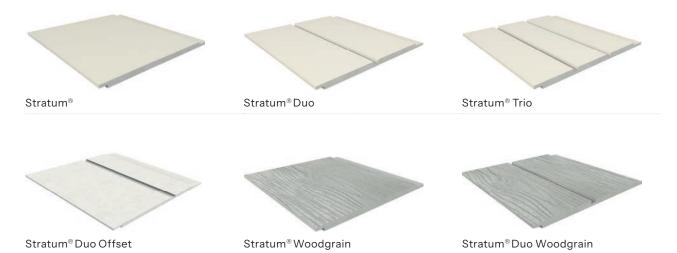



Stratum® Trio Woodgrain



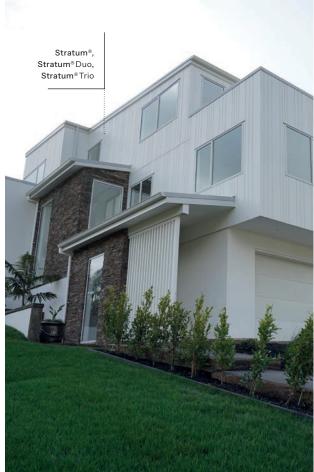




Product: Stratum® Trio







Size mm	Product code
3000×17	4092822



Aluminium ext	ernal corner	Stratum <sup>®</sup> joiner		
Size mm	Product code	Size mm	Product code	
3000×17	4092818	3000	4092920	
4000×17	4092913			







Cavity vent strip

Size mm	Product code
2700×19	4092887

Size mm	Product code
i moula	

2400

4093657

Aluminium H mould Size mm Product code 3000 4093905



Product: Stratum §, Stratum §, Duo, Stratum §, Trio.







H mou	ld joine	r
-------	----------	---

Interstorey drainage flashing

Pre-cut scriber Stratum®

Size mm	Product code	Size mm	Product code	Size mm	Product code
100	4093906	3000	4093907	5400 × 40 × 18	4093705







Pre-cut scriber Stratum® Duo

Pre-cut scriber Stratum® Trio

Castellated batten H3.1 treated

Size mm	Product code	Size mm	Product code	Size mm	Product code	
5400 × 40 × 18	4093706	5400 × 40 × 18	4093914	2700 × 45 × 20	4092910	







Timber batten H3.1 treated

Innova edge sealer

Snap on corner part A

Size mm	Product code	Size g	Product code	Size mm	Product code
5400×70×20	4092902	400	4092899	3600	4092917



Snap on corner part B

Size mm	Product code
3600	4092919

# **Contour**®

### Weatherboards

The Contour® board is expertly designed to replicate the charm of older-style weatherboard homes, featuring a rebate at the top of each plank to enhance the shadowline for a more defined, traditional appearance. It combines the classic appeal of weatherboards with the modern advantage of low-maintenance durability.



With its narrower profile and distinctive rebate, the Contour® board delivers a truly authentic weatherboard look, setting it apart from other cladding options.

#### Features and benefits

- Narrower profile for a traditional weatherboard aesthetic.
- Delivered primed and ready for painting, saving preparation time.
- Built to last with exceptional durability, resistant to rot and decay.
- Quick, simple installation: manual nailing, gun nailing or screw fixing.
- BRANZ Appraised No. 848.
- Can Achieve a 30 and 60 min Fire Rating.
- Concealed fixing.



#### **Profile**



Contour®



Thickness	Profile	Weight	Width	Length	Product	Pack
mm		kg/lm	mm	mm	code	size
10	Contour®	2.1	170	4200	4092772	180











Aluminium	interna	l corner

1		
7		
	/	1
	1	1

Cavity vent/starter strip

Aluminium internal corner		Aluminium exte	ernal corner	Cavity vent/sta	arter strip
Size mm	Product code	Size mm	Product code	Size mm	Product code
3000×17	4092822	3000×17	4092818	2700 × 33	4093659
		4000×17	4092913		





Precut scriber Contour®

J mould		Precut scriber Contour®		
Size mm	Product code	Size mm	Product code	
2400	4093658	5400 × 40 × 18	4093660	

# **Duraplank**®

### Weatherboards

Duraplank® combines the timeless appeal of traditional weatherboards with modern durability and ease of installation. Designed to resist decay and rot, this non-combustible cladding solution is built to last.

With two attractive finish options – smooth and woodgrain — Duraplank® delivers an authentic weatherboard aesthetic while offering the strength to endure the demands of everyday life.

#### Features and benefits

- Evokes the charm of traditional weatherboards.
- Built for longevity with high durability and resistance to rot and decay.
- Quick, simple installation: manual nailing, or screw fixing.

Thickness mm	Profile	Weight kg/lm	Width mm	Length mm	Product code	Pack size	
7.5	Smooth	1.9	180	4200	4092795	120	
	Smooth	2.4	230		4092793	120	
	Smooth	3.1	300		4092794	120	
	Woodgrain	2.4	230		4092796	120	
	Woodgrain	3.1	300		4092797	120	





### **Profiles**



Smooth



Woodgrain



Product: Duraplank® Woodgrain







4092853

Size mm

3000×17

7				
	1		/	1
		1		

l corner	Aluminium exte	ernal corner	Duraplank® ex	ternal corner soaker	
Product code	Size mm	Product code	Size mm	Product code	
4092822	3000×17	4092818	180	4093701	
	4000×17	4092913	230	4092852	

300





Duraplank® concealed back soaker

Innova edge sealer

Size mm	Product code	Size g	Product code
180	4093702	400	4092899
230	4092872		
300	4092873		



### Exterior and interior walls

# Exterior facades

# Duragroove®

### **Exterior facades**

Duragroove is a highly versatile, vertically grooved panel designed to add striking visual appeal to any project. Its sleek, modern design enhances contemporary spaces, and the option to mix and match profiles allows for endless creative expression.

Produced in large sheets across a variety of sizes, Duragroove® features a shiplap join for a seamless appearance and quicker installation. With four unique profiles, it's easy to achieve the perfect look:

- Narrow: 100mm between grooves.
- Wide: 150mm between grooves.
- Extra Wide: 400mm between grooves, with an enhanced groove width for added visual appeal.
- Wide Woodgrain: 150mm between grooves, featuring a natural woodgrain texture.





#### Features and benefits

- Excellent choice for long wall spans, offering large panel sizes that has more coverage per sheet.
- It's efficient design reduces installation time while delivering a clean, modern finish.
- Acrylic-sealed panels improve paint adhesion and finish.
- Quick to install no need for taped and filled joints.
- Panels resistant to air, steam, salt and sunlight.
- BRANZ Appraised No.'s 798 and 799.

Length and product code

Can achieve 30 and 60 min Fire Rating.

Thickness	Weight		Width					Pack
	kg/m²	Profile	mm	2450mm	2750mm	3000mm	3600mm	size
9	12.4	Smooth Narrow	1200	4092596	4092597	4092598		40
		Smooth Wide		4092599	4092600	4092601	4092602	40
		Smooth Extra Wide		4092590	4092591	4092592		40
		Woodgrain Wide		4092603	4092604	4092605		40



### **Profiles**







Narrow

Wide Extra Wide



Woodgrain Wide









Alum	ıın	IIIm	external	CORNER



Horizontal H mould

Size mm	Product code	Size mm	Product code	Size mm	Product code
3000×12	4092821	3000×12	4092817	3000	4093703
		4000×12	4092912		







Timber batten H3.1 treated

H mould joiner Cavity vent strip

Size mm	Product code	Size mm	Product code	Size mm	Product code
100	4093904	2700 × 19	4092887	5400×70×20	4092902



Innova edge sealer

Size g	Product code
400	4092899



 $\textbf{Product:} \ Duragroove § Smooth Wide, \textbf{Nuline} § \textbf{Square} \ 205 mm, \textbf{Montage} § \textbf{Slimline} \ Tile \ Onyx.$ 

# **Durascape**®

### **Exterior facades**

Durascape® is the perfect solution for projects requiring a sleek, large panel aesthetic. It is a cladding solution featuring a 5mm shiplap join that creates a subtle vertical shadowline while ensuring quick and easy installation. The shiplap design also minimizes movement, removing the risk of cracking over time.

For a bold, contemporary look, Durascape® delivers a sleek 'rendered' finish when coated with textured paint on-site — offering limitless design potential and a striking modern aesthetic.







#### Features and benefits

- Easy to handle and built to last.
- Perfect for single-story and medium-height applications with large panels.
- Quick installation no need for taped and flushed joints.
- Panels unaffected by air, steam, salt and sunlight.
- Can be finished in a range of decorative coatings.
- BRANZ Appraised No.'s 798 and 799.
- Can achieve 30 and 60 min Fire Rating.

Thickness mm	Weight kg/m²	Width mm	Length mm	Product code	Pack size
9	12.4	1200	2450	4092625	40
			3000	4092627	40



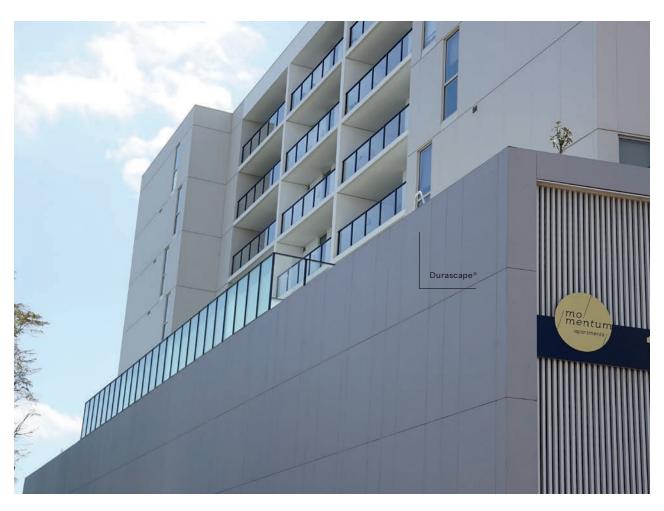

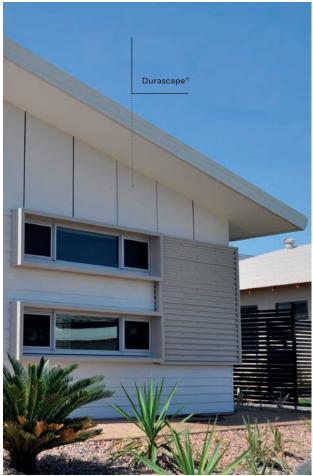

### Profile



Durascape®







Aluminium internal corner

Size mm	Product code
3000×12	4092821

Aluminium external corne	۵

Aluminium external corner		Horizontal H mould		
Size mm	Product code	Size mm	Product code	
3000 × 12	4092817	3000	4093703	
4000×12	4092912			







Horizontal H mould joiner

	- <u>-                                    </u>	
ize mm	Product code	Size mm
00	4093904	2700×19

Cavity vent strip		Timber batten H3.1 treated		
Size mm Product code		Size mm	Product code	
2700 × 19	4092887	5400 × 70 × 20	4092902	



100

Innova edge sealer

Size g	Product code
400	4092899

# **Duragrid**<sup>®</sup>

### **Exterior facades**

Duragrid® is a cutting-edge cladding system featuring a sleek, geometric 10mm expressed join for a modern and stylish aesthetic. Ideal for projects aiming to achieve a clean and contemporary design. Duragrid® panels offer exceptional design flexibility.

Duragrid® has a smooth, flat surface and square-edge finish that is suitable for expressed joins, providing a facade suitable for a number of finishes; from painted to textured coatings.




#### Features and benefits

- Built to withstand the elements while being easy to handle.
- Compatible with a range of coatings, from paint to textured finishes.
- Unaffected by air, steam, salt or sunlight.
- Quick and simple to install using manual nailing, gun nailing or screw fixing.
- Layout flexibility, horizontal and vertical installation, brick bond/stack bond pattern.
- Can be used in high wind zones up to and including extra high (NZS3604:2011).
- BRANZ Appraised No. 752.

Thickness mm	Weight	Width	Length and product code Width			— Pack	- Pack
	kg/m²	mm	1190mm	2390mm	2990mm	size	
9	12.4	590		4092588		40	
		1190	4092585	4092587	4092589	40	



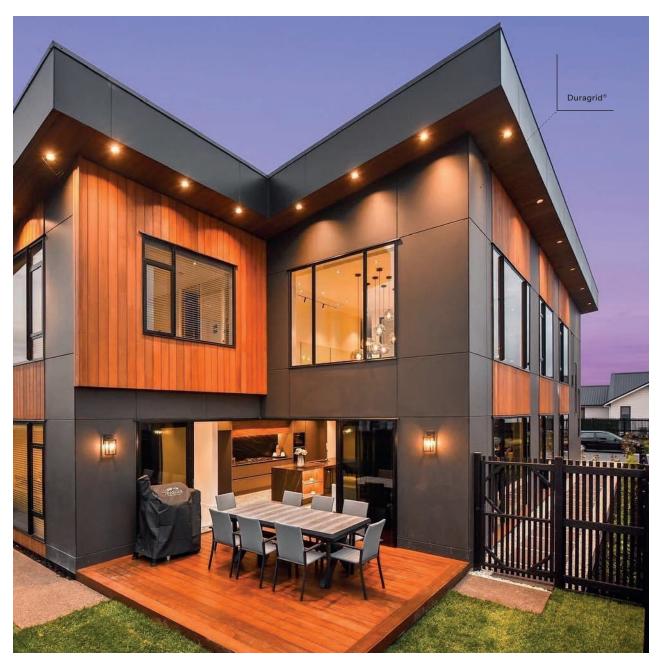

### Profile



Duragrid®









Timber batten H3.1 treatedCavity vent stripFacade backing stripSize mmProduct codeSize mmProduct code $5400 \times 70 \times 20$ 4092902 $2700 \times 19$ 409288730004094033



Innova edge sealer

Size g	Product code
400	4092899



## **Duracom**<sup>®</sup>

### **Exterior facades**

Duracom<sup>®</sup> is the perfect solution for creating visually striking facades in low-to-medium rise buildings. Designed with commercial projects in mind, Duracom<sup>®</sup> uses compressed fibre cement panels combined with a steel top hat system for exceptional durability and impact resistance.

The system's signature 10mm express join delivers a sophisticated grid-like pattern that can be customized into various shapes and sizes, allowing flexibility to suit any design vision. Duracom® supports a wide range of finishes, from sleek painted surfaces to textured coatings, ensuring a versatile and modern look.

#### Features and benefits

- Delivered primed and ready for painting, saving preparation time.
- Compatible with a variety of decorative finishes for unique facade styles.
- Quick and simple installation using top hats.
- Suitable for high wind zones applicable up to 7kPA.

Thickness	Weight	Width	Length and product code			— Pack	
mm	kg/m²	mm	1800mm	2400mm	3000mm	size	
9	14.2	1200	4092550	4092552	4092555	40	

#### Profile



Duracom®









Primary top hat In		Intermediate top	nat Horizontal backing strip		cking strip
Size mm	Product code	Size mm	Product code	Size mm	Product code
3000 × 120 × 35 1.15BMT	4092812	3000 × 50 × 35 1.15BMT	4092814	2990	4092896



#### EPDM foam gasket

Size mm	Product code
25000 × 48 × 3	4092813



### Exterior and interior walls

# Exterior base sheets

### Stonesheet®

### Exterior base sheets

Stonesheet® is the ideal choice for stone wall substrates and true masonry on timber or steel-framed buildings.

This 9mm thick, flat, square-edged panels are designed specifically for both residential interior and exterior applications, offering a reliable and purposebuilt solution where other substrates may fall short.

Stonesheet® is the perfect base for stone tile facades, providing excellent performance and durability.

### Features and benefits

- Suitable for both exterior and interior stone tile facades
- Classified Type A Category 3 for exterior use ensuring reliability.
- Non-structural substrate.
- Capable of supporting a maximum stone facade weight of 60kg/m².

Thickness	Weight	Width	Length	Product	Pack
mm	kg/m²	mm	mm	code	size
9	12.4	1200	3000	4092629	60







#### Accessories







Cavity vent strip

Innova edge sealer

Stainless steel washer – 100 per bag

Size mm	Product code	Size g	Product code	Size mm	Product code
2700×19	4092887	400	4092899	$M6 \times 18 \times 1.6$	4094053



Joint tape

Size mm	Product code
60×2000	4093654



#### Exterior and interior walls

# Pre-finished facades

# Montage®

#### Pre-finished facades

Montage® is a versatile fibre cement facade system that can be used both externally and internally. The range brings depth and texture to your project, offering the flexibility to combine profiles and colours for a truly unique and distinctive final look.

With a colour palette carefully considered to be blended or contrasted, you'll have an array of options to play with. The deep form embossed into the panels also creates a striking effect, making your project stand out from the streetscape.



- 4 profiles available Concrete, Slimline Tile, Stackstone and Woodgrain.
- Lightweight and easy to install.
- Perfect for internal or external installation.
- Pre-finished using a multiple coat finishing system.
- Fully sealed panels that are weather resistant and won't rot or burn.
- Quick and Simple to install.

Thickness mm	Profile	Weight kg/m²	Width mm	Length mm	Product code	Pack size
16	Concrete — Square with Circle	18.9	455	3030	4092705	1
	Concrete — Rectangle with Circle	_			4092704	1
	Concrete — Smooth Plain	•			4092706	1
18	Slimline Tile — Limestone	17			4092673	1
	Slimline Tile — Sandstone	_			4092674	1
	Slimline Tile — Basalt				4092675	1
	Slimline Tile — Onyx				4092676	1
18	Stackstone — Limestone	16.7			4092684	1
	Stackstone — Sandstone	_			4092681	1
	Stackstone — Basalt	_			4092682	1
	Stackstone — Onyx				4092683	1
18	Woodgrain — Light Teak	17.8			4092661	1
	Woodgrain — Dark Mahogany	-			4092662	1
	Woodgrain — Grey Oak	_			4092663	1
	Woodgrain — Black Oak				4092664	1

Woodgrain Light Teak, Woodgrain Black Oak, Concrete Rectangle Circle, Concrete Smooth plain are stock items.

All other profiles are made to order, please contact your local Innova representative for more details.








#### **Profiles**

#### Concrete







Rectangle with Circle

#### Slimline Tile



Onyx



Sandstone



Limestone

#### Stackstone

Basalt



Basalt



Onyx



Sandstone



Limestone

#### Woodgrain



Light teak



Dark Mahogany



Grey Oak



Black Oak



 $\label{lem:product:montage of Concrete} Perchangle with Circle, Montage of Stackstone Rectangle with Circle and Montage of Slimline Tile Limestone.$ 

#### Pre-formed corners — horizontal installation





Concrete

Woodgrain

Size mm	Product code	Profile	Size mm	Product code
455 × 16	4092742	Light Teak	455×18	4092669
		Dark Mahogany	455×18	4092670
		Grey Oak	455×18	4092671
		Black Oak	455×18	4092672





Slimline Tile

Stackstone

Profile	Size mm	Product code	Profile	Size mm	Product code
Limestone	455 × 18	4092677	Limestone	455×18	4092688
Sandstone	455 × 18	4092678	Sandstone	455×18	4092685
Basalt	455 × 18	4092679	Basalt	455×18	4092686
Onyx	455×18	4092680	Onyx	455×18	4092687

#### Pre-formed corners — vertical installation



Woodgrain

Profile	Size mm	Product code
Light Teak	3030×18	4092665
Dark Mahogany	3030×18	4092666
Grey Oak	3030 × 18	4092667
Black Oak	3030×18	4092668

#### Installation accessories — powder coated aluminium corners — common

Profile	Size mm	Product code
Aluminium external corner for Concrete and Woodgrain Grey Oak	3600×36	4092709
Aluminium external corner for Slimline Tile and Stackstone Limestone		4092711
Aluminium external corner for Slimline Tile and Stackstone Sandstone		4092714
Aluminium external corner for Slimline Tile and Stackstone Basalt		4092708
Aluminium external corner for Slimline Tile and Stackstone Onyx and Woodgrain Black Oak		4092713
Aluminium external corner for Woodgrain Light Teak		4092712
Aluminium external corner for Woodgrain Dark Mahogany		4092710
Aluminium internal corner for Concrete and Woodgrain Grey Oak		4092736
Aluminium internal corner for Slimline Tile and Stackstone Limestone		4092738
Aluminium internal corner for Slimline Tile and Stackstone Sandstone		4092741
Aluminium internal corner for Slimline Tile and Stackstone Basalt		4092735
Aluminium internal corner for Slimline Tile and Stackstone Onyx and Woodgrain Black Oak	*	4092740
Aluminium internal corner for Woodgrain Light Teak		4092739
Aluminium internal corner for Woodgrain Dark Mahogany		4092737

#### Installation accessories







Vertical cavity starter

Horizontal cavity starter

Cavity clip

Size mm	Product code	Size mm	Product code	Size mm	Product code
3000 × 23.50 × 80	4092759	3000 × 21.50 × 80	4092733	60 × 56 × 15	4092701







Self adhesive spacer

High hat joiner

Single hat joiner

				9,	9		
Size mm	Product code	Size mm	Product code	Size mm	Product code		
50 × 50 × 15	4092699	3030×20	4092691	3030×16	4092693		



#### Installation accessories - common







Ring nail for face fixing on timber

Primer for cut edges and joints

SS	screws	for	cli	ns	tο	the	frame

Size mm	Product code	Size g	Product code	Size mm	Product code
65×3	4092695	100	4092743	35	4092696



SS screws for clips to steel frame

Size mm	Product code
19 × 4	4092697

#### Installation accessories — eaves







Eaves trim channel

External corner

Internal corner

Profile	Size mm	Product code	Profile	Size mm	Product code	Profile	Size mm	Product code
Grey	2370 × 55	4092724	Grey	$86 \times 32.5$	4092727	Grey	$86 \times 67.4$	4092730
Brown	×35	4092726	Brown	× 51.3	4092729	Brown	×32.5	4092732
Black		4092725	Black		4092728	Black		4092731





Trim joint

End cap

Profile	Size mm	Product code	Profile	Size mm	Product code
Grey	40 × 32.5		Grey	32.5 × 25	4092718
Brown		4092723	Brown		4092720
Black		4092722	Black		4092719

#### Accessories — sealants

Profile	Size ml	Product code
Concrete grey sealant for Concrete profiles, Stackstone Basalt and Woodgrain Grey Oak	600	4092825
Off white sealant for Slimline Tile and Stackstone Limestone		4092831
Sandstone sealant for Slimline Tile Sandstone		4092829
Dark Grey sealant for Slimline Tile Basalt and Stackstone Onyx		4092830
Black sealant with Slimline Tile Onyx and Woodgrain Black Oak		4092826
Redwood sealant for Stackstone Sandstone and Woodgrain Light Teak		4092827
Dark Amber for Woodgrain Dark Mahogany		4092828

#### Accessories — touch up paint

Profile	Size ml	Product code
Concrete	80	4092746
Woodgrain — Light Teak		4092758
Woodgrain — Dark Mahogany		4092756
Woodgrain — Grey Oak		4092757
Woodgrain — Black Oak		4092755
Slimline Tile — Limestone		4092752
Slimline Tile — Sandstone		4092754
Slimline Tile — Basalt		4092751
Slimline Tile — Onyx		4092753
Stackstone — Sandstone		4092750
Stackstone — Limestone		4092748
Stackstone — Basalt		4092747
Stackstone — Onyx	,	4092749



#### Exterior and interior walls

# Pre-cladding

## **Durabarrier**®

#### Pre-cladding

Durabarrier® is a rigid air barrier designed for use in both residential and commercial timber or steel-framed buildings. It helps resist high winds by equalising air pressure within the cavity to match external conditions, ensuring enhanced protection.

This 4.5mm or 6mm-thick fibre cement sheet is sealed on the face and edges, effectively blocking out water, air, and wind while allowing moisture vapour to escape.

#### Features and benefits

- Correct installation will ensure resistance to moisture damage and rot.
- Face-sealed helps rapidly displace moisture, maintaining the integrity of the structure.
- Provides short-term weather tightness during construction.
- Temporarily secures buildings ahead of cladding.

Thickness mm	Weight	Width	Length and pro	Length and product code				
	kg/m²	mm	2450mm	2750mm	3000mm	Pack size		
4.5	6.1	1200	4092577	4092578		60		
6	8.3		4092579		4092580	60		

#### Accessories



Z Flashing

Size mm	Product code
3000×75	4093710







 $\textbf{Product:} \, \mathsf{Durabarrier}^{\otimes}.$ 



#### Exterior and interior walls

# Interior linings

## **Duraliner**®

#### Interior linings

Duraliner® is a general-purpose fibre cement lining board, designed for flush jointing and ideal for a variety of applications. It excels in wet areas, interior linings, and as a substrate for ceramic wall tiles, as well as for fire and acoustically-rated interior walls.

- Ideal for use in fire and acoustic-rated wall applications.
- Suitable for a wide range of uses, including internal wet areas.
- Rebated on 3 edges for efficient jointing and installation.



Thickness mm	Weight	Width	Length and pr	– Pack			
	kg/m²	mm	2400mm	2700mm	3000mm	3600mm	size
6	8.3	900	4092610				60
		1200	4092608	4092611	4092612	4092615	60
9	12.4	1200	4092619	4092620	4092621	4092623	40







# Intergroove

#### Interior linings

Intergroove is the perfect choice for creating a modern, floor to ceiling feature wall or a traditional dado wall design. This strong and durable internal wall lining is designed with a V-shaped groove, combining the classic look of traditional panelling with the modern benefits of fibre cement, including easy maintenance and lasting durability.

- Easy to handle and built for long-lasting performance.
- Quick to install as it eliminates the need for taped and filled joints. Factory sealed panels aid paint application.
- Features a 2mm deep v groove.

Thickness	Weight	Width	Length	Product	Pack
mm	kg/m²	mm	mm	code	size
7.5	10.4	1200	2700	4092659	60







## Innova on the inside

By leading the way in using fibre cement beyond traditional facades, Innova is redefining its role in residential and commercial interiors. Transforming industry perceptions, our range seamlessly extends from exterior to interior spaces with 'Innova on the Inside'.

Innova fibre cement is ideal for interiors as an alternative and unique approach to feature walls inside the home or office space.

Innova's innovative products and ideals are changing perceptions of where fibre cement cladding can be used in residential and commercial environments — not just the exterior or as a lining board in wet areas.

Innova aims to quash misconceptions such as 'fibre cement is typically for exterior facades'. Innova is committed to changing the perception that fibre cement can only be used externally and in wet areas, increasing understanding of how fibre cement can be used in interior settings industry-wide.

Providing aesthetics and versatility in design, Innova's broad range of fibre cement products are textured, smooth or ready for finishing on-site when other lining products need to be painted, wallpapered or tiled to achieve a visually pleasing finish.









#### Eaves and soffits

# Eaves lining and soffits

## **Durasheet**®

#### Eaves lining and soffits

Durasheet® is the ideal solution for gable ends, eaves lining, soffits, carports, and external ceilings. This versatile general-purpose sheet is compatible with both timber and steel-framed buildings, offering flexibility across various applications.

Available in two thicknesses, Durasheet® provides options for both residential and light commercial use. With a wide range of sizes, it accommodates both narrow and wide soffits, expanding your design possibilities.

- 4.5mm thickness: used mainly in timber-framed residential buildings for soffit/eaves linings and cladding features such as gable ends.
- 6.0mm thickness: recommended for light commercial applications, high wind zones and steel framed constructions.
- Can be hand nailed or screwed for convenience and efficiency.

Thickness	Weight	Width	Length and pr		— Pack		
mm	kg/m²	mm	1800mm	2400mm	2700mm	3000mm	size
4.5	6.1	450		4092559			120
		600		4092560		_	120
		750		4092561			120
		900		4092562			60
		1200	4092557				60
			-	4092558	4092563	4092564	60
6	8.8	900		4092569			60
		1200	4092566	4092568	4092570	4092571	60







## **Duralux**®

#### Eaves lining and soffits

Duralux® is a versatile general-purpose fibre cement building board designed for a wide range of demanding applications. Whether used for interior lining, domestic and commercial soffits, external ceilings, wet areas, or internally as a substrate for ceramic wall tiles, Duralux® delivers reliable performance in both residential and commercial settings.





With two available thicknesses, it's easy to apply to both timber and steel framing, making it a flawless choice for a variety of projects.



- Correct installation and maintenance will ensure full water resistance for long-lasting performance.
- Can be easily decorated in a variety of finishes to suit your design needs.
- Classified as Type B Category 2 product for use in applications sheltered from direct weathering.
- Ideal for expressed joint eaves and ceilings in residential, medium density and commercial applications.

Thickness mm	Weight	Width	Length and pr	— Pack	Pack			
	kg/m²	mm	2400mm	2700mm	3000mm	3600mm	size	
6	8.3	1200	4092635	4092637	4092638	4092639	60	_
9	12.4	1200	4092640	4092642	4092644		40	



# Intergroove

#### Eaves lining and soffits

Intergroove brings a refined architectural finish to eaves with clean lines and linear grooves. Its V-shaped groove adds a subtle shadowline that enhances the roofline with a sense of depth and sophistication. Designed for durability and low maintenance, Intergroove offers a modern yet timeless look that elevates the aesthetic of the eaves.

- Easy to handle and built for long-lasting performance.
- Quick to install as it eliminates the need for taped and filled joints.
- Features a 2mm deep v groove.

Thickness	Weight	Width	Length	Product	Pack
mm	kg/m²	mm	mm	code	size
7.5	10.4	1200	2700	4092659	60







### Flooring and underlay

# Flooring

## **Durafloor**®

#### **Flooring**

Durafloor® provides one solution for substrate in interior wet areas such as bathrooms and laundries, as well as a range of exterior applications.

Its innovative tongue-and-groove joint eliminates the need for blocking, simplifying the installation process and speeding up the job. It is an excellent alternative to particle board or plywood.

Durafloor® is also perfect for use on balconies, verandahs, sundecks, and, when premium quality is essential, as a total floor solution.

- Can be installed using traditional gun-nailing methods for efficiency.
- Same tongue-and-groove technology as traditional sheet flooring (e.g. Strandfloor).
- Lower installation costs compared to standard compressed sheet flooring.
- Provides a solid, durable surface that feels more stable and secure underfoot compared to timberbased sheet flooring.

Thickness mm	Weight	t Width mm	Length and prod	Pack		
	kg/m²		2250mm	2400mm	2700mm	size
19	26.2	600	4092582		4092583	40
22	30.4	600		4092584		40

Product: Durafloor®



Product: Durafloor®









## Compressed flooring

High-density compressed flooring is a premium substrate, primarily used in commercial applications for high-load areas. It is also idea for interior floors in wet areas, as well as for upper storeys, transportable buildings, and exterior decks. Its durability and strength make it particularly well-suited for demanding environments.

- Impact resistant.
- Highly durable and dimensionally stable.
- Suitable for both interior wet areas and external decking.

Thickness mm	Weight kg/m²	Width mm	Length and product code		— Pack	
			1800mm	2400mm	size	
15	24.8	1200		4092535	20	
18	29.7	1200	4092539	4092540	20	
24	39.7	1200		4092544	15	









#### Flooring and underlay

# Underlay

### Ceramic tile underlay

Ceramic tile floor underlay is a specially formulated fibre cement sheet, designed as a stable substrate for slate and ceramic floor tiles. It offers a reliable base for tiling over both new and existing timber floors.


In dry areas, ceramic tile floor underlay creates an impervious, easily-cleaned surface, while in wet areas or locations prone to flooding or water splash, a waterproof membrane should be installed between the underlay and the tiles for added protection.

#### Features and benefits

- Engineered for optimal performance as a floor tile substrate.
- Excellent substrate for floor tiles, both slate and ceramic.
- Suitable for both dry and wet areas (with additional waterproofing as required).
- Can be applied to new or existing timber floors for added convenience.

Thickness	Weight	Width	Length	Product	Pack
mm	kg/m²	mm	mm	code	size
6	8.4	1200	1800	4092792	60



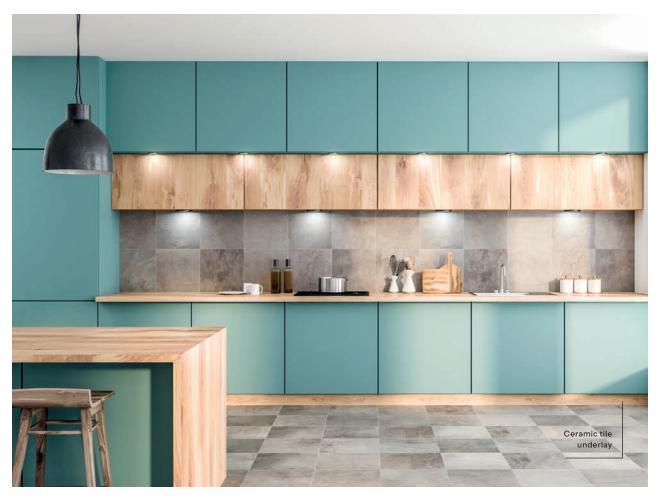





# Effects

### Effects<sup>®</sup> fascia

Effects® fascia is a specially formulated fibre cement board designed to provide long term durability and maintain an excellent finish for the life of the home.

Effects® fascia is the perfect choice to complement all Innova® cladding products, providing the aesthetics, performance and durability for any residential home design.

#### Features and benefits

- Designed to accommodate Durasheet® for a seamless transition.
- Gun nailable and easy to cut and handle.
- Pre-primed ready to paint.
- Provides a timber look without the problems associated with real timber and will not rot, swell, twist.

Thickness mm	Weight kg/m²	Width mm	Length mm	Pack size	Product code	
14	18	175	4200	120	4093793	











# Fibre cement specialists. Built on change.

**Auckland** 09 273 1457

**Technical Helpline** 0800 424 234

Follow us Instagram @innovafibrecementnz

Facebook @innovafibrecementnz

LinkedIn /innova-fibre-cement Warranty: Please refer to innovafibrecement.co.nz for detailed warranty information.



